

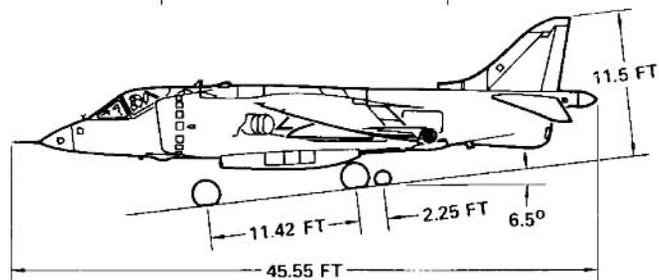


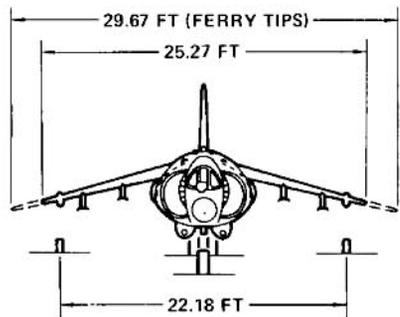




# STANDARD AIRCRAFT CHARACTERISTICS

**AV-8A HARRIER**

**HAWKER-SIDDELEY**

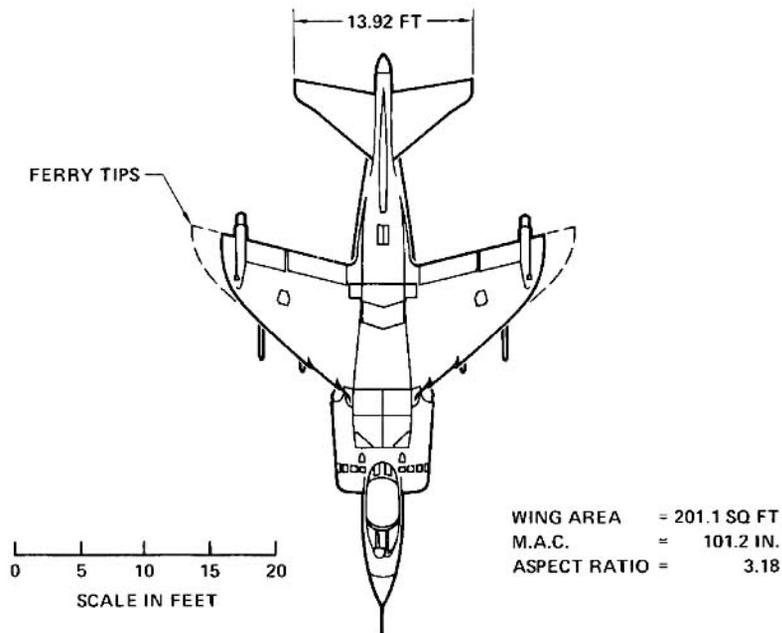

**DESCRIPTIVE ARRANGEMENT**

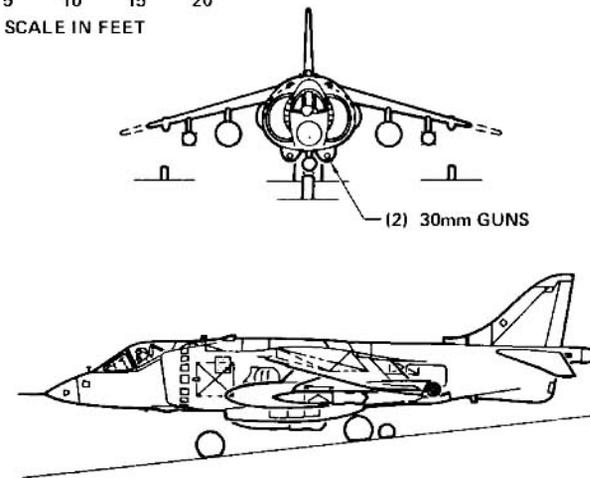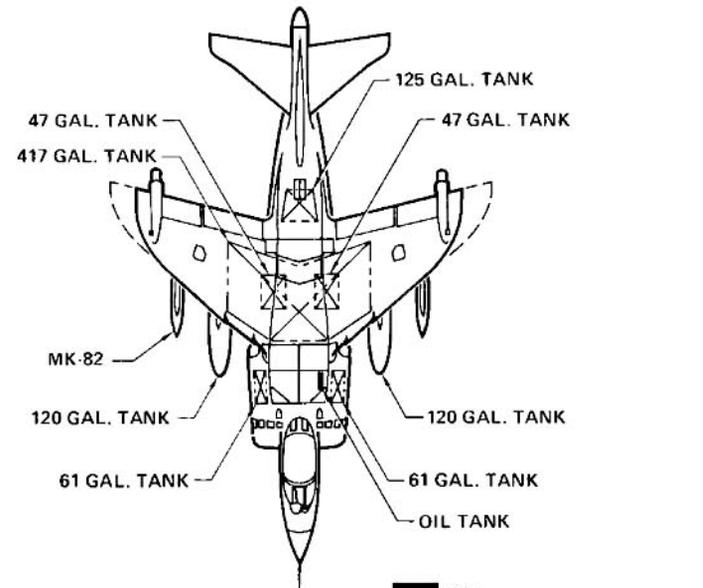

**ARMAMENT AND TANKAGE**

POWER PLANT	MISSION AND DESCRIPTION	WEIGHTS																																																																																		
<p>Number and model (1) F402-RR-401            Manufacturer Rolls-Royce            Specifications: Rolls-Royce Spec. No. 301            Type Axial flow, non-mixed, vectored fan, turbofan            Augmentation Water injection            Length (including nozzles) 137.2 in.            Diameter 48.05 in.            Dry weight 3653 lb            Nozzle rotation angles                Front 0° to 98.5°                Rear 0° to 98.5°</p> <p><b>RATINGS</b></p> <table border="1"> <thead> <tr> <th>POWER SETTING (TIME)</th> <th>STATIC THRUST* AT SEA LEVEL (LB)</th> <th>RPM</th> </tr> </thead> <tbody> <tr> <td>Short lift wet (15 sec)</td> <td>20,930</td> <td>104.6%</td> </tr> <tr> <td>Normal lift wet (2.5 min)</td> <td>20,640</td> <td>103.9%</td> </tr> <tr> <td>Short lift dry (15 sec)</td> <td>19,920</td> <td>102.1%</td> </tr> <tr> <td>Normal lift dry (2.5 min)</td> <td>18,990</td> <td>100.0%</td> </tr> <tr> <td>Maximum (15 min)</td> <td>16,350</td> <td>95.0%</td> </tr> <tr> <td>**Military setting (30 min)</td> <td>13,925</td> <td>90.3%</td> </tr> <tr> <td>Maximum continuous</td> <td>13,090</td> <td>89.0%</td> </tr> <tr> <td>90% maximum continuous</td> <td>11,850</td> <td>86.0%</td> </tr> <tr> <td>75% maximum continuous</td> <td>9,870</td> <td>80.6%</td> </tr> <tr> <td>Idle</td> <td>1,000</td> <td>25.1%</td> </tr> </tbody> </table> <p>*Includes splay loss            **In lieu of standard intermediate rating</p>	POWER SETTING (TIME)	STATIC THRUST* AT SEA LEVEL (LB)	RPM	Short lift wet (15 sec)	20,930	104.6%	Normal lift wet (2.5 min)	20,640	103.9%	Short lift dry (15 sec)	19,920	102.1%	Normal lift dry (2.5 min)	18,990	100.0%	Maximum (15 min)	16,350	95.0%	**Military setting (30 min)	13,925	90.3%	Maximum continuous	13,090	89.0%	90% maximum continuous	11,850	86.0%	75% maximum continuous	9,870	80.6%	Idle	1,000	25.1%	<p>The AV-8A Harrier is a single-seat, transonic, light-attack aircraft with a vertical/short takeoff and landing capability that enables operation from either advanced airfields or small sea based carriers (LPH, LPD). The aircraft's primary mission is close air support with the capability to operate from austere bases in the battlefield area, a mission generally involving ground loiter, short radii and limited take-off and landing area preparation. V/STOL capability, an essential ingredient of the Sea Control Ship concept, permits Harrier adaptation to sea based ships with alternate mission capabilities of air and surface intercept and combat air patrol.</p> <p>The AV-8A is powered by a Rolls Royce Bristol Pegasus fanjet engine and is distinguished by a shoulder-mounted swept wing and an all-movable, swept stabilator, both with marked negative dihedral; a single vertical fin and rudder; and two large shoulder-side inlets and four rotatable engine thrust nozzles, one inlet and two nozzles on each side of the fuselage. Conventional aerodynamic controls are used in wing-borne flight and engine bleed air reaction controls are used in jet-borne flight with a mix of the two systems used when transitioning between modes of flight. Plain trailing-edge inboard flaps are provided for the high-lift configuration. The AV-8A has four wing pylon stations and one fuselage pylon station for external stores, carries two external fuselage mounted 30 mm guns, and is equipped with an inertial navigation and weapon-aiming system (INAS) and a head-up display (HUD). The landing gear consists of a nose gear and a single main gear in bicycle or tandem arrangement and two outrigger gears, one near each wing tip. A hydraulically operated speedbrake is located on the lower fuselage surface immediately aft of the main landing gear. Other features include a self-contained start capability and a Martin-Baker MK-9A ejection seat for emergency egress.</p>	<p><b>LOADING</b></p> <table border="1"> <thead> <tr> <th></th> <th>LB</th> <th>L.F.</th> </tr> </thead> <tbody> <tr> <td>Empty</td> <td>11,966</td> <td></td> </tr> <tr> <td>Basic</td> <td>12,098</td> <td></td> </tr> <tr> <td>Design</td> <td>20,300</td> <td>Subsonic 7.5</td> </tr> <tr> <td>Combat</td> <td>19,469</td> <td>Supersonic 4.5</td> </tr> </tbody> </table> <p>Maximum takeoff        STO 24,600        VTO 17,500    Maximum landing        VL 16,900 @ -12 fps</p> <p><b>FUEL AND OIL</b></p> <table border="1"> <thead> <tr> <th>NO. TANKS</th> <th>GALLONS</th> <th>LOCATION</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>341</td> <td>Fuselage, integral</td> </tr> <tr> <td>2</td> <td>417*</td> <td>Wing, integral</td> </tr> <tr> <td>2</td> <td>240</td> <td>Wing, external, drop</td> </tr> </tbody> </table> <p>Grade JP4 or JP5    Specification MIL-J-5624    *Increases to 434 when external fuel is carried</p> <p><b>OIL</b></p> <table border="1"> <tbody> <tr> <td>Integral with engine (Ferry mission - 3.25 gal.)</td> <td>2.4 gal.</td> </tr> </tbody> </table> <p><b>WATER</b></p> <table border="1"> <tbody> <tr> <td>1</td> <td>60 gal.</td> </tr> </tbody> </table> <p><b>STORE STATIONS</b></p> <table border="1"> <thead> <tr> <th>NO.</th> <th>LOCATION</th> <th>LOADING*</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Fuselage</td> <td>Stores up to 2000 lb</td> </tr> <tr> <td>2</td> <td>Inboard wing</td> <td>Stores up to 2000 lb</td> </tr> <tr> <td>2</td> <td>Outboard wing</td> <td>Stores up to 1000 lb</td> </tr> </tbody> </table> <p>*Design airplane load factors will be attainable with up to 1100 lb on the inboard stations and 600 lb on the outboard and centerline stations.</p> <p><b>GUNS</b></p> <table border="1"> <thead> <tr> <th>NO.</th> <th>LOCATION</th> <th>LOADING</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Either side of fuselage centerline pylon</td> <td>30 mm single barrel Aden machine gun installed in removable pods.</td> </tr> </tbody> </table>		LB	L.F.	Empty	11,966		Basic	12,098		Design	20,300	Subsonic 7.5	Combat	19,469	Supersonic 4.5	NO. TANKS	GALLONS	LOCATION	5	341	Fuselage, integral	2	417*	Wing, integral	2	240	Wing, external, drop	Integral with engine (Ferry mission - 3.25 gal.)	2.4 gal.	1	60 gal.	NO.	LOCATION	LOADING*	1	Fuselage	Stores up to 2000 lb	2	Inboard wing	Stores up to 2000 lb	2	Outboard wing	Stores up to 1000 lb	NO.	LOCATION	LOADING	2	Either side of fuselage centerline pylon	30 mm single barrel Aden machine gun installed in removable pods.
POWER SETTING (TIME)	STATIC THRUST* AT SEA LEVEL (LB)	RPM																																																																																		
Short lift wet (15 sec)	20,930	104.6%																																																																																		
Normal lift wet (2.5 min)	20,640	103.9%																																																																																		
Short lift dry (15 sec)	19,920	102.1%																																																																																		
Normal lift dry (2.5 min)	18,990	100.0%																																																																																		
Maximum (15 min)	16,350	95.0%																																																																																		
**Military setting (30 min)	13,925	90.3%																																																																																		
Maximum continuous	13,090	89.0%																																																																																		
90% maximum continuous	11,850	86.0%																																																																																		
75% maximum continuous	9,870	80.6%																																																																																		
Idle	1,000	25.1%																																																																																		
	LB	L.F.																																																																																		
Empty	11,966																																																																																			
Basic	12,098																																																																																			
Design	20,300	Subsonic 7.5																																																																																		
Combat	19,469	Supersonic 4.5																																																																																		
NO. TANKS	GALLONS	LOCATION																																																																																		
5	341	Fuselage, integral																																																																																		
2	417*	Wing, integral																																																																																		
2	240	Wing, external, drop																																																																																		
Integral with engine (Ferry mission - 3.25 gal.)	2.4 gal.																																																																																			
1	60 gal.																																																																																			
NO.	LOCATION	LOADING*																																																																																		
1	Fuselage	Stores up to 2000 lb																																																																																		
2	Inboard wing	Stores up to 2000 lb																																																																																		
2	Outboard wing	Stores up to 1000 lb																																																																																		
NO.	LOCATION	LOADING																																																																																		
2	Either side of fuselage centerline pylon	30 mm single barrel Aden machine gun installed in removable pods.																																																																																		
<b>ELECTRONICS</b>	<b>DEVELOPMENT</b>																																																																																			
<p>Air data computer Smiths            CNI systems ARN-91            TACAN ARN-91            IFF Cossor MK-10            VHF/UHF Radio Pessey PTR 175            Standby UHF Utar D403M            CCS Elliott            Voice recorder Davall            Auto stabilizer Elliott            Head up display Smiths            Inertial navigation attack system AJB-8(V)            Standby attitude reference J.E.T.            Compass system Sperry C2G            Pilot display record Telford            Provisions for SEAM ASA-83            Effective A/C 10 and up:                UHF radio and homer (replaces PTR-175) ARC 150                VHF/FM radio ARC-114                IFF (replaces Cossor MK-10) APX-72                Compass (replaces C2G) Sperry C2J                Radar altimeter APN 194</p>	<p>First flight prototype (GR MK-1) 13 Aug. 1966            Navy preliminary evaluation (GR MK-1) 11 Apr. 1969            Acceptance flight (AV-8A) 19 Jan. 1971</p>																																																																																			
	<b>DIMENSIONS</b>																																																																																			
	<p>Wing combat tips/(ferry tips)</p> <table border="1"> <tbody> <tr> <td>Area</td> <td>201.1/(215.9) sq ft</td> </tr> <tr> <td>Span</td> <td>25.27/(29.67) ft</td> </tr> <tr> <td>M.A.C.</td> <td>101.2 in.</td> </tr> <tr> <td>Sweepback (25% chord) (projected)</td> <td>35.17°</td> </tr> <tr> <td>Incidence</td> <td>1.75°</td> </tr> <tr> <td>Dihedral</td> <td>12°</td> </tr> <tr> <td>Length</td> <td>45.55 ft</td> </tr> <tr> <td>Height</td> <td>11.50 ft</td> </tr> <tr> <td>Wheelbase</td> <td>11.42 ft</td> </tr> <tr> <td>Tread (outrigger)</td> <td>22.18 ft</td> </tr> <tr> <td>MLG tires</td> <td>26 x 7.75</td> </tr> <tr> <td>NLG tires</td> <td>26 x 8.75</td> </tr> <tr> <td>Outrigger tires</td> <td>13.5 x 6.0</td> </tr> </tbody> </table>	Area	201.1/(215.9) sq ft	Span	25.27/(29.67) ft	M.A.C.	101.2 in.	Sweepback (25% chord) (projected)	35.17°	Incidence	1.75°	Dihedral	12°	Length	45.55 ft	Height	11.50 ft	Wheelbase	11.42 ft	Tread (outrigger)	22.18 ft	MLG tires	26 x 7.75	NLG tires	26 x 8.75	Outrigger tires	13.5 x 6.0																																																									
Area	201.1/(215.9) sq ft																																																																																			
Span	25.27/(29.67) ft																																																																																			
M.A.C.	101.2 in.																																																																																			
Sweepback (25% chord) (projected)	35.17°																																																																																			
Incidence	1.75°																																																																																			
Dihedral	12°																																																																																			
Length	45.55 ft																																																																																			
Height	11.50 ft																																																																																			
Wheelbase	11.42 ft																																																																																			
Tread (outrigger)	22.18 ft																																																																																			
MLG tires	26 x 7.75																																																																																			
NLG tires	26 x 8.75																																																																																			
Outrigger tires	13.5 x 6.0																																																																																			





## PERFORMANCE SUMMARY

TAKEOFF LOADING CONDITION	① HI-HI-HI	③ LO-LO-LO	⑤ HI-LO-HI	⑦ LO-LO-LO	⑨ COMBAT AIR PATROL	⑪ FERRY
	CLEAN	(5) MK-82 S.E.	(3) MK-82 S.E. (2) MK-83 L.D.G.P.	(3) MK-82 S.E. (2) 120 GAL. TANKS	(2) AIM-9B	(2) 120 GAL. TANKS
Takeoff weight (D) lb	17,684 (E)	21,729 (F)	22,549 (F)	22,547 (F)	19,475 (F)	20,930 (F)
Fuel internal/external (JP-5, 6.8 lb/gal.) lb	5,161/-	5,161/-	5,161/-	5,277/1,632	5,161/-	5,277/1,632
Payload lb	None	2850	3680	1710	394	None
Wing loading lb/sq ft	87.8	108.0	112.0	112.0	96.8	103.9
Stall speed - power off kt	162	168.0	172.0	172.0	159.0	165.0
Takeoff run at S.L. calm (A) ft	60	910	1080	1080	410	735
Takeoff run at S.L. 25 kt wind (A) ft	50	700	850	850	300	550
Takeoff to clear 50 ft - calm (A) ft	370	1930	2180	2180	1110	1660
Maximum speed/altitude (B)kt/ft	594/S.L.	555/S.L.	556/S.L.	552/S.L.	564/S.L.	556/S.L.
Rate of climb at S.L. (B/C) fpm	17,700/12,700	12,200/8700	11,700/8300	11,500/8150	14,300/10,300	12,800/9100
Time: S.L. to 20,000 ft (B/C) min	1.39 / 1.87	2.17 / 2.98	2.26 / 3.07	2.30 / 3.12	1.81 / 2.42	2.08 / 2.75
Time: S.L. to 30,000 ft (B/C) min	2.40 / 3.22	4.12/5.46	4.22/5.76	4.39/5.96	3.48/4.34	3.75/5.05
Service ceiling (100 fpm) (B/C) ft	44,000/43,000	38,300/37,300	37,500/36,700	37,400/36,400	40,900/40,100	39,100/38,200
Combat range na mi	823 (I)	768	498 (I)	493/392 (G)	632 (I)	980/920 (G) (I)
Average cruising speed kt	458	363	450	370	453	447
Cruising altitude initial ft	38,518	8,111	33,388	8,111	36,709	35,000
Cruising altitude final ft	43,513	8,111	36,748	8,111	40,864	41,000
Combat radius na mi	378 (I)	113	188 (I)	175	100 (I)	-
Mission time (H) hr	1.95	0.85	0.93	1.26	1.43	-
Average cruising speed kt	459	296	452	297	453	-
Loiter time hr	-	-	-	-	0.94	-
COMBAT LOADING CONDITION	② CLEAN	④ STORES RETAINED	⑥ STORES RETAINED	⑧ STORES RETAINED TANKS DROPPED	⑩ MISSILES RETAINED	⑫ TANKS RETAINED
Combat weight lb	15,424	19,469	20,289	19,367	17,214	17,970
Engine power	Military	Military	Military	Military	Maximum	Military
Fuel lb	3,100	3,100	3,100	4,150	3,100	4,150
Combat speed/altitude kt/ft	525/40,100	531/S.L.	532/S.L.	533/S.L.	525/35,000	532/S.L.
Rate of climb at combat altitude (B/C) fpm	4500/3600	21,000/9950	13,800/9800	11,100/10,100	4700/3600	15,400/11,000
Combat ceiling (500 fpm) (B/C) ft	46,100/45,100	40,100/39,000	39,000/37,800	39,900/38,600	43,100/42,100	41,900/40,800
Rate of climb at S.L. (B/C) fpm	20,600/14,550	14,000/9,950	13,800/9,900	14,100/10,100	16,700/12,400	15,300/11,000
Maximum speed at S.L. (B/C) kt	595/570	556/531	558/533	556/533	565/540	557/532
Maximum speed/altitude (B) kt/ft	595/S.L.	556/S.L.	558/S.L.	556/S.L.	565/S.L.	557/S.L.
Landing weight lb	13,002	14,211	14,211	14,298	14,850	14,645
Fuel lb	679	718	718	805	737	824
Stall speed - power off kt	130	136	136	137	139	138

NOTES: A. Short lift wet, 15 sec rating  
 B. Maximum thrust, 15 min. rating  
 C. Military thrust, 30 min. setting  
 D. Includes 200 pounds of water which is consumed at initial takeoff.  
 E. With strakes, w/o guns, ammo, (4) pylons, and Q rack.


F. All loadings except clean airplane include guns, ammo, (4) pylons and Q rack. Ferry mission with ferry wing tips and inflight refueling probe.  
 G. Tanks dropped when empty/tanks retained.  
 H. Mission time excludes warm-up, takeoff and reserve times.  
 I. Radii/Range can be increased 5 n. miles if maximum thrust rating is used in climbs.  
 J. Fuel consumption increased 5% for service tolerance.

## MISSION SUMMARY - ALTERNATE LOADINGS


		HI-HI-HI		HI-LO-HI		HI-LO-LO-HI		LO-LO-LO		DECK-LAUNCHED INTERCEPT	
											
EXTERNAL STORE LOADING (A)	TOW	COMBAT RADIUS NM (D)	MISSION TIME HOUR (B)	COMBAT RADIUS NM (D)	MISSION TIME HOUR (B)	COMBAT RADIUS NM (D)	MISSION TIME HOUR (B)	COMBAT RADIUS NM (D)	MISSION TIME HOUR (B)	COMBAT RADIUS NM (D)	MISSION TIME HOUR (B)
③ (5) MK-82 Snakeye	21,729	271	1.28	192	0.94	—	—	113	0.86	249	1.08
⑤ (3) MK-82 Snakeye (2) MK-83	22,549	266	1.26	188	0.93	—	—	113	0.85	247	1.08
⑦ (3) MK-82 Snakeye (2) 120 gal. tank	22,547	405	1.87	323	1.52	203	1.24	175	1.26	363	1.56
⑨ (2) AIM-9 Sidewinder	19,475	308	1.45	221	1.07	—	—	118	0.92	272	1.17
⑬ (5) MK-82	21,489	279	1.32	198	0.97	—	—	115	0.97	254	1.10

Notes:  
 (A) All loadings include guns, ammunition, (4) pylons and 1 rack.  
 (B) Mission time excludes warm-up, takeoff and reserve times.  
 (C) Fuel consumption increased 5% for service tolerance.  
 (D) Combat radii can be increased 5 na. mi. by using maximum thrust for climb.


**MACH NUMBER**

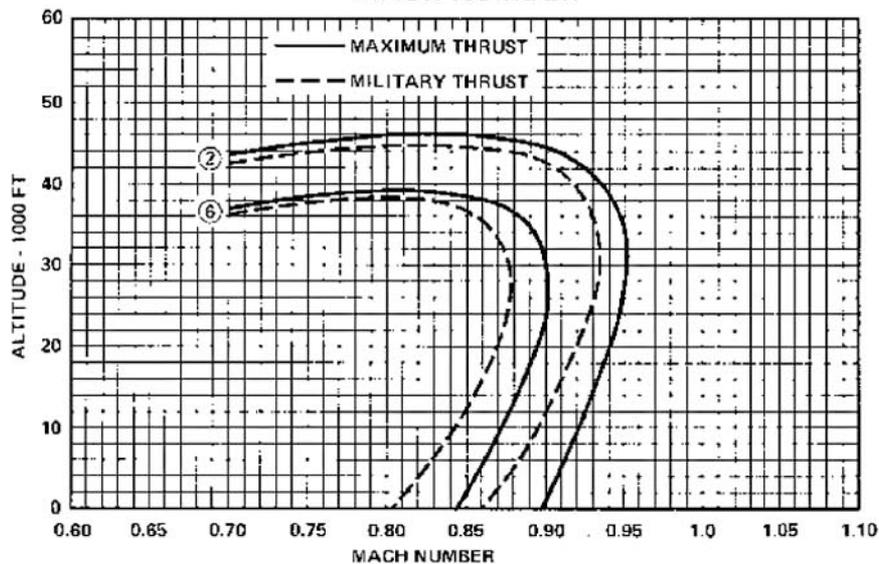


**CLIMB**

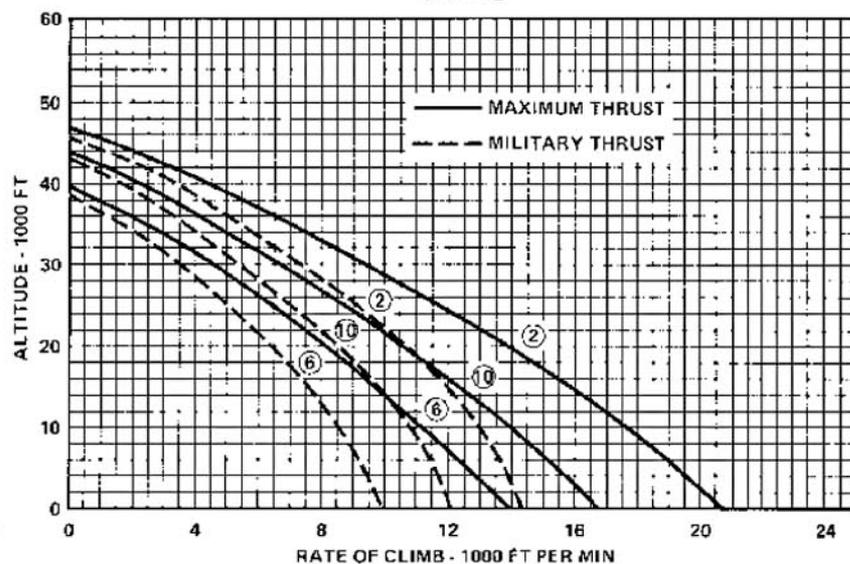

**FIELD SHORT TAKEOFF**

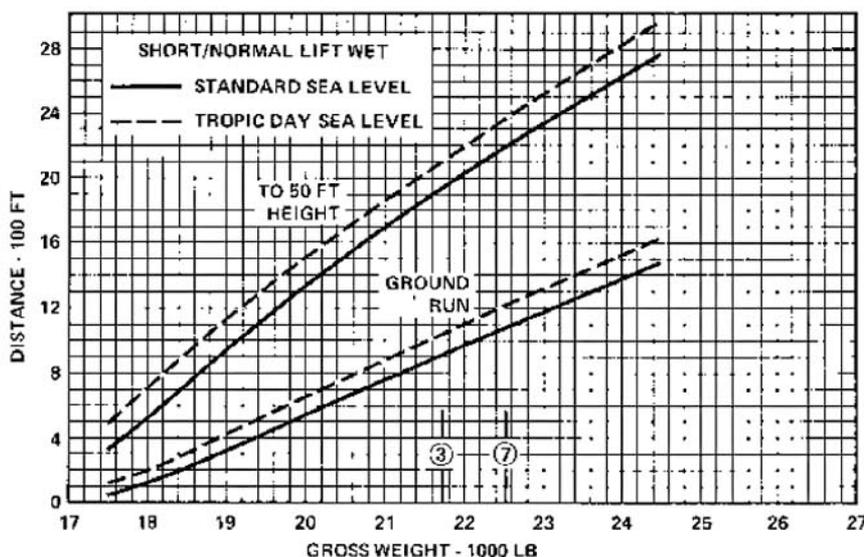


**HOVER CEILING**

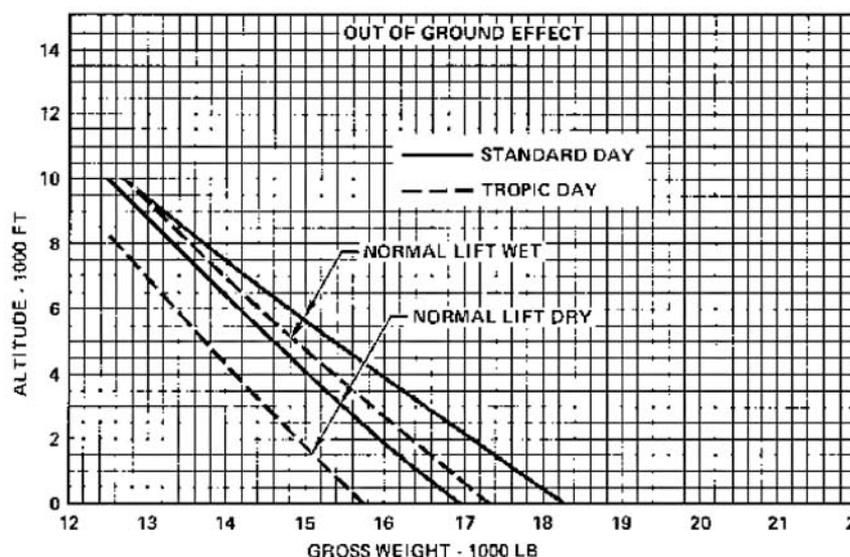

○ LOADING CONDITION COLUMN NUMBER

**EXTERNAL STORE LOADING**

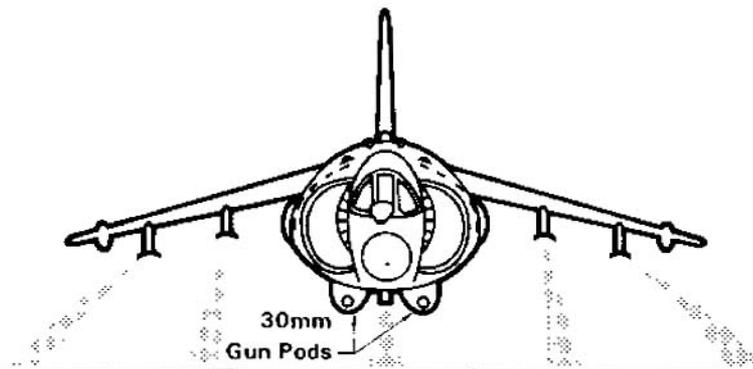

STORE	5	4	3	2	1
<b>GUIDED MISSILES – AIR-TO-AIR</b> (AIM-9G) Sidewinder	1				1
<b>ROCKET LAUNCHERS – AIR-TO-GROUND</b>					
LAU-10A	1	1		1	1
LAU-69A	1	1		1	1
LAU-68A	1	1		1	1
<b>BOMBS</b>					
MK-81	1	1	1	1	1
MK-82	1	1	1	1	1
MK-83		1		1	
MK-81 Snakeye	1	1	1	1	1
MK-82 Snakeye	1	1	1	1	1
MK-77	1	1	1	1	1
MK-20 Rockeye II	1	1		1	1
CBU-24		1		1	
<b>PRACTICE BOMBS</b>					
MK-76	6				6
MK-106	6				6
<b>FLARES</b>					
SUU-40	1				1
<b>FUEL TANKS</b>					
120 U.S. gal. Combat Tanks		1		1	

## NOTES:


## LO-LO-LO MISSION

1. WARM-UP, TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CRUISE OUT: At sea level, at speed for maximum range. External tanks dropped when empty.
3. COMBAT FUEL ALLOWANCE: (15) minutes at 30 minute engine setting at sea level. Stores dropped at end of combat.
4. CRUISE BACK: At sea level at speed for maximum range.
5. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.



## DECK LAUNCHED INTERCEPT MISSION

1. WARM-UP, TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CLIMB: On course to 36,089 feet with 15 minute engine rating.
3. DASH OUT: At 36,089 ft. at 15 minute engine rating.
4. COMBAT FUEL ALLOWANCE: (2) minutes at 15 minute engine rating at 36,089 feet.
5. CRUISE BACK: At altitudes and speeds for maximum range.
6. DESCENT: To sea level. No fuel, time or distance credited.
7. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.

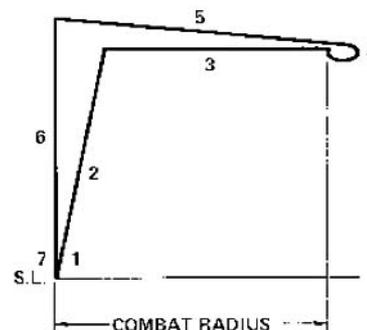


## PERFORMANCE BASIS:

- (a) Wind tunnel and flight test data by Hawker-Siddeley Aviation.
- (b) Supplemented by estimated drag data.
- (c) Rolls-Royce Engine Specification No. 301 dated 20 March 1970 with fuel consumption increased 5% for service tolerance.

## NOTES:


## HI-LO-HI MISSION

1. WARM-UP, TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
3. CRUISE OUT: At altitudes and speeds for maximum range. External tanks dropped when empty.
4. DESCENT: To sea level. No fuel, time or distance credited.
5. COMBAT FUEL ALLOWANCE: (5) minutes at 30 minute engine setting at sea level. Drop stores after combat.
6. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
7. CRUISE BACK: At altitudes and speeds for maximum range.
8. DESCENT: To sea level. No fuel, time or distance credited.
9. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.

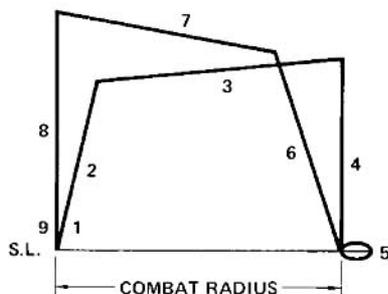

## HI-HI-HI MISSION

1. WARM-UP, TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
3. CRUISE OUT: At altitudes and speeds for maximum range. External tanks dropped when empty.
4. COMBAT FUEL ALLOWANCE: (5) minutes at 30 minute engine setting. Drop stores after combat, when applicable.
5. CRUISE BACK: At altitudes and speeds for maximum range.
6. DESCENT: To sea level. No fuel, time or distance credited.
7. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.

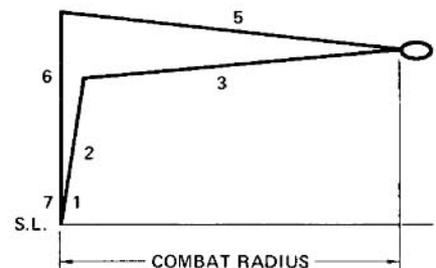


## PERFORMANCE BASIS:

- (a) Wind tunnel and flight test data by Hawker-Siddeley Aviation.
- (b) Supplemented by estimated drag data.
- (c) Rolls-Royce Engine Specification No. 301 dated 20 March 1970 with fuel consumption increased 5% for service tolerance.

## NOTES:


## COMBAT AIR PATROL

1. WARM-UP, TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
3. CRUISE OUT: 100 nautical miles at altitudes and speeds for maximum range. External tanks dropped when empty.
4. LOITER: On station at altitudes and speeds for maximum endurance.
5. COMBAT FUEL ALLOWANCE: (2) minutes at 15 minute engine rating at 35,000 feet.
6. CRUISE BACK: 100 nautical miles at altitudes and speeds for maximum range.
7. DESCENT: To sea level. No fuel, time or distance credited.
8. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.

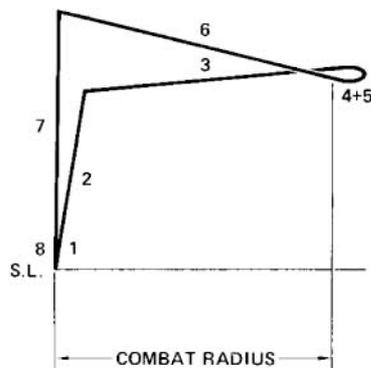


## FERRY MISSION

1. WARM-UP, TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
3. CRUISE OUT: At altitudes and speeds for maximum range. External tanks retained/dropped when empty.
4. DESCENT: To sea level. No fuel, time or distance credited.
5. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.

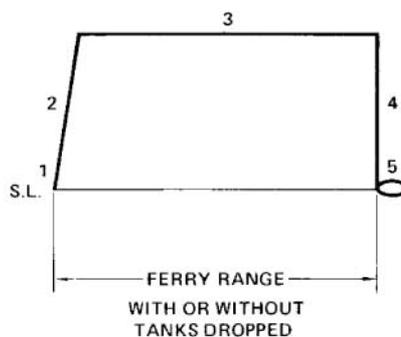

## HI-LO-LO-HI MISSION

1. WARM-UP TAKEOFF AND ACCELERATE: (3) minutes with maximum continuous thrust.
2. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
3. CRUISE OUT: At altitudes and speeds for maximum range. External tanks dropped when empty.
4. DESCENT: To sea level. No fuel, time or distance credited.
5. CRUISE: 100 nautical miles at sea level, at speed for maximum range.
6. COMBAT FUEL ALLOWANCE: (5) minutes at 30 minute engine setting at sea level. Drop bombs after combat.
7. CRUISE: 100 nautical miles at sea level, at speed for maximum range.
8. CLIMB: On course to optimum cruise altitude with 30 minute engine setting.
9. CRUISE BACK: At altitudes and speeds for maximum range.
10. DESCENT: To sea level. No fuel, time or distance credited.
11. RESERVE: 5% of total initial fuel plus fuel for 10 minutes loiter at sea level at speeds for maximum endurance.

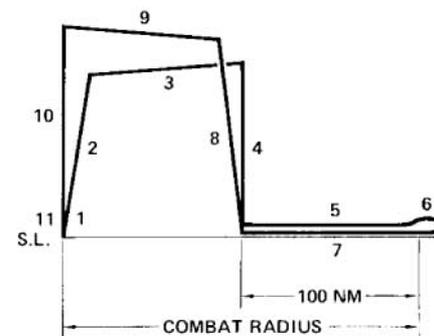

## PERFORMANCE BASIS:

- (a) Wind tunnel and flight test data by Hawker-Siddeley Aviation.
- (b) Supplemented by estimated drag data.
- (c) Rolls-Royce Engine Specification No. 301 dated 20 March 1970 with fuel consumption increased 5% for service tolerance.